



## WP60 WP65

### PoC Portable Radio



Large capacity battery



Single/Group call



Loud Speaker



Cloud SIM

- Global PTT Service
- Support NFC, Bluetooth and Wi-Fi
- Professional Appearance for Commercial Users
- Easy-to-deploy & Easy-to-expand Network

## Highlights

### Global PTT Service

Users can use PTT service globally via public mobile network.

### NFC(optional)/ Bluetooth/ Wi-Fi

Bluetooth and Wi-Fi provide flexible ways of using PTT service in various working environments. NFC brings more possibilities for extensible application, such as patrol system.

### Cloud-SIM for More Flexible and Stable Networks

Automatic network selection, eliminating APN settings and minimal network instability.

### Flexible Call Features

WP60 provides various call types, such as private call/group call/all call/alarm call. It supports real-time storage of recordings to local and one-click playback or download on-line recordings through the dispatch platform.

### AI-based Noise Reduction

Filter surrounding noise to deliver clearer and high-recognition voice.

### High Audio output

WP60 provides clear and high audio output, which is suitable for users in noisy environments.

### Multiple dispatching services


Working with dispatching platform, WP60 provides functions such as stun, kill, revive, Geo-fencing and track playback. Relevant applications can be developed to provide specific business solution.

## Specification

### General Specifications

Communications Mode & Frequency Band	Asia/Europe: TDD-LTE: Band 38/40/41 FDD-LTE: Band 1/3/5/7/8/20 WCDMA: Band 1/2/5/8 GSM/GPRS: Band 2/3/5/8  America: FDD-LTE: Band 2/4/5/7/12/13/17/25/26 WCDMA: Band 1/2/4/5/8 GSM/GPRS: Band 2/5
Wi-Fi	2.4/5GHz
Operating System	Android 7.0
Data Interface	Type/Mirco USB
Battery	3.7V 3600mAh (standard)/5200mAh (optional)
Dimensions	115mm*54mm*30mm
Weight	330g (Inclue Antenna &Battery)
Display	128*64 resolution , single color LCD (WP60)
Water-proof & Dust-proof	IP54
Working Temperature	-20 C ~ +60 C
Storage Temperature	-40 C ~ +85 C

## Standard Accessories

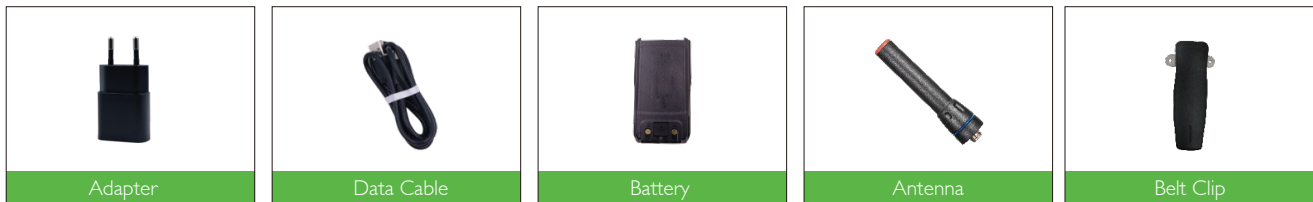

## Option Accessories



## Applicable Industry

